

FOR ARCHITECTS, INTERIOR DESIGNERS, HOSPITALITY AND WELLNESS PROJECTS

Thermal vessels

Twelve hot and cold vessels, each delivered with its Hot & Cold Unit.
Water from 37 to 104°F. Delivered free to the 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.
Two forms ready to deliver; ten made to commission. Two pages per vessel: dimensioned drawing, then specifications.



TIDE



MONOLITH



OVUM



LUNA



OBLONG



AURUM



FACET



COVE



NOOK



PRISM



BLOCK




ALCOVE

VESSEL	FORM AND MATERIAL	OVERALL, IN (L x W x H)	AVAILABILITY
TIDE	Flared rectangle, white acrylic	70.9 x 31.5 x 23.6	Ready to deliver
MONOLITH	Long form, white acrylic, Hot & Cold Unit built in	76.8 x 31.5 x 28	Ready to deliver
OVUM	Egg form, black acrylic	66.9 x 31.5 x 22.8	Made to commission
LUNA	Round bowl, white acrylic	Ø 59.1 x 23.6	Made to commission
OBLONG	Oval, Satin Steel	66.9 x 29.9 x 23.6	Made to commission
AURUM	Barrel, Satin Steel	Ø 35.4 x 43.3	Made to commission
FACET	Octagonal, Satin Steel	60.6 x 32.1 x 28	Made to commission
COVE	Generous oval, white acrylic	70.9 x 35.4 x 23.6	Made to commission
NOOK	Compact, white acrylic	47.2 x 28.3 x 23.6	Made to commission
PRISM	Faceted, white acrylic	66.9 x 31.9 x 22.8	Made to commission
BLOCK	Rectangle, white acrylic	66.9 x 31.5 x 22.8	Made to commission
ALCOVE	Oval with one straight side, white acrylic	66.9 x 31.5 x 22.8	Made to commission

READY TO DELIVER

TIDE

Hot & Cold thermal vessel, with its compact Hot & Cold Unit.

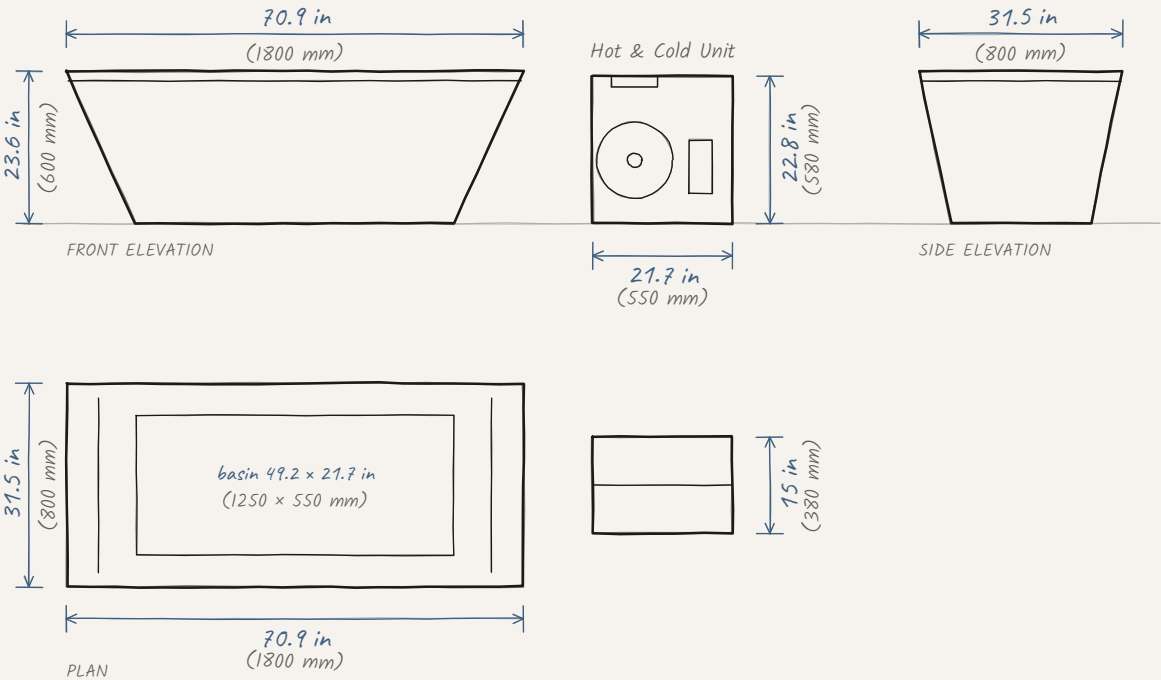

A rectangle in white acrylic, its walls opening from a narrow base to a flat rim. The Hot & Cold Unit stands beside it.

Overall
70.9 L x 31.5 W x 23.6 H in (1800 x 800 x 600 mm)

Availability
Ready to deliver. Delivered in 1 to 2 weeks

Hot & Cold Unit
Separate compact unit, 15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm), drawn beside the vessel at the same scale

Water temperature
37 to 104°F

Delivery
Free, 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.

Front elevation, side elevation and plan at one scale. Dimensions in inches, millimeters in parentheses. Base widths and wall curves follow the product; only the figures shown are specified.

TIDE Specifications


VESSEL	
Overall	70.9 L x 31.5 W x 23.6 H in (1800 x 800 x 600 mm)
Basin, inside	49.2 L x 21.7 W in (1250 x 550 mm)
Water capacity	81.9 US gal (310 L)
Weight, empty	238 lb
Crate	74.8 x 35.4 x 31.5 in, 304 lb gross, wooden frame
MATERIALS & FINISH	
Shell	Acrylic with insulating foam layer
Finish	White acrylic
Jets and light	Two integrated circulation jets and LED light
Drain	3/4 in
Cover	PU cover, included
INCLUDED	
Vessel	Cover, 3 filters, light, drain
Hot & Cold Unit	Hoses, filter element, filter wrench, seals, user manual
ORDER	
Lead time	Ready to deliver. Delivered in 1 to 2 weeks
Delivery	Free, 48 contiguous United States
Warranty	5-Year Warranty on the shell, 1 year on the Hot & Cold Unit

HOT & COLD UNIT	
Type	Separate compact unit, heats and cools, on casters
Water temperature	37 to 104°F (3 to 40 °C)
Ambient range	34 to 113°F (1 to 45 °C)
Dimensions	15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm)
Thermal output	Cooling 3,210 W · heating 4,150 W · 1 HP
Water care	Filtration, ozone disinfection
Controls	Touch screen, Wi-Fi app
ELECTRICAL	
Unit supply	110 to 125 V, 60 Hz, grounded outlet
Protection	Residual current device on the unit, tested monthly
Power draw	About 1,150 W, around 10 A at 120 V; a standard 15 A household circuit is enough
INSTALLATION	
Prepare	Water supply to fill, an outlet for the plug, a drain point
Placement	Freestanding. Indoors or outdoors; a roof or some shade is recommended. Keep the cover on when the weather turns extreme; plug kept away from rain and water
Unit clearance	At least 20 in (50 cm) on every side; never in a closet or cabinet
Water level	At least 2 in (5 cm) above the vessel inlet

READY TO DELIVER

MONOLITH

Hot & Cold thermal vessel, with its Hot & Cold Unit built in.

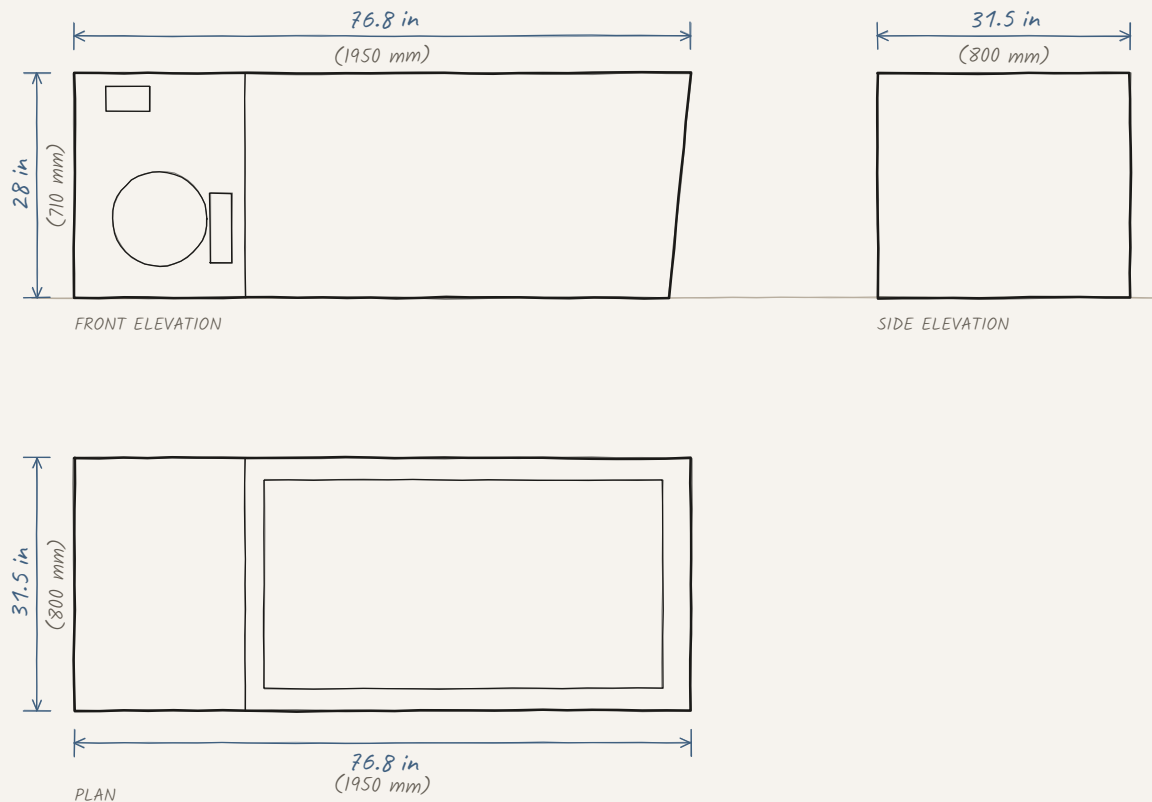

A long, low form in white acrylic. Heating, cooling and water care sit in one end of the vessel: nothing stands beside it.

Overall

76.8 L x 31.5 W x 28 H in (1950 x 800 x 710 mm)

Availability

Ready to deliver. Delivered in 1 to 2 weeks

Hot & Cold Unit

Built into the technical end of the vessel; nothing stands beside it

Water temperature

37 to 104°F

Delivery

Free, 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.

Front elevation, side elevation and plan at one scale. Dimensions in inches, millimeters in parentheses. Base widths and wall curves follow the product; only the figures shown are specified.

MONOLITH


Specifications

VESSEL	
Overall	76.8 L x 31.5 W x 28 H in (1950 x 800 x 710 mm)
MATERIALS & FINISH	
Shell	Acrylic, with acrylic skirt
Finish	White acrylic
Light	Color underwater light
Cover	Included
INCLUDED	
With the vessel	Cover, 2 filters, drip tray, drain
BUILT-IN SYSTEM	
Hot & Cold Unit	1 HP, built into the technical end
Function	Heats and cools
Water care	Circulation, filtration, ozone disinfection
Controls	Touch screen, Wi-Fi app
ELECTRICAL	
Supply	110 to 125 V, 60 Hz, grounded outlet; about 1,150 W, around 10 A at 120 V
INSTALLATION	
Prepare	Water supply to fill, an outlet for the plug, a drain point
Placement	Freestanding. Indoors or outdoors; a roof or some shade is recommended. Keep the cover on when the weather turns extreme; plug kept away from rain and water
ORDER	
Lead time	Ready to deliver. Delivered in 1 to 2 weeks
Delivery	Free, 48 contiguous United States
Warranty	5-Year Warranty on the shell, 1 year on the Hot & Cold Unit

MADE TO COMMISSION

OVUM

Hot & Cold thermal vessel, an egg form in black acrylic.

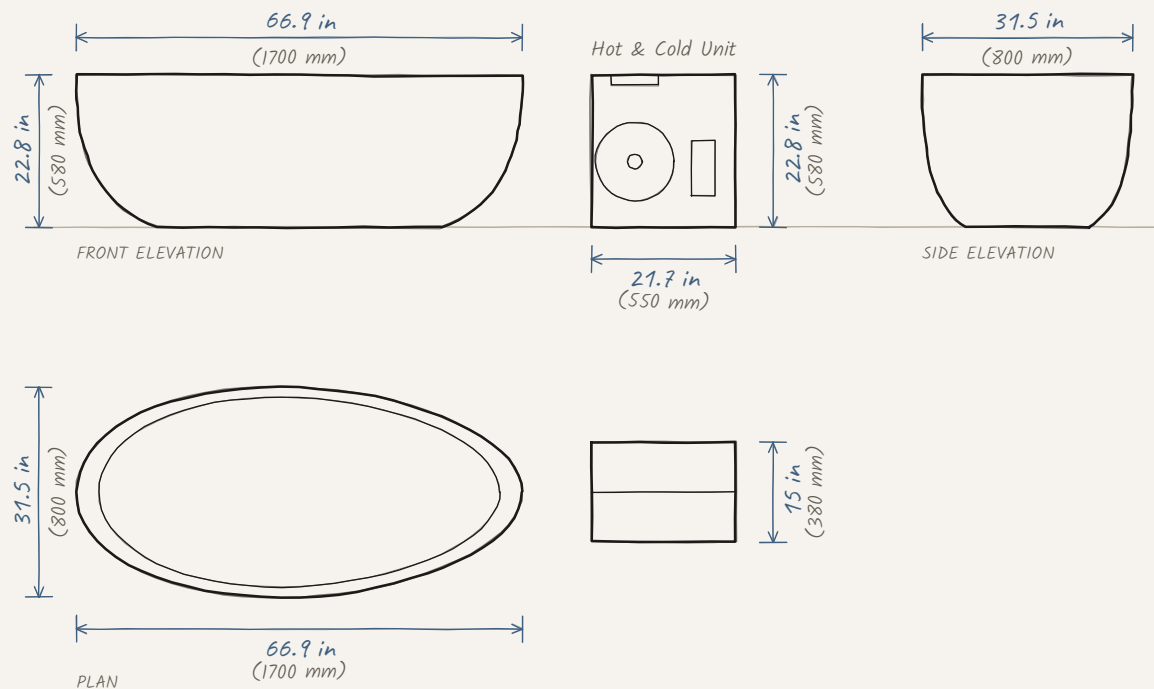

Walls curving inward to a narrower base, closing in a fine rounded rim. Black inside and out. The compact Hot & Cold Unit stands beside it.

Overall

66.9 L × 31.5 W × 22.8 H in (1700 × 800 × 580 mm)

Availability

Made to commission, delivered in about 3 months, in many cases sooner

Hot & Cold Unit

Separate compact unit, 15 W × 21.7 D × 22.8 H in (380 × 550 × 580 mm), drawn beside the vessel at the same scale

Water temperature

37 to 104°F

Delivery

Free, 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.

Front elevation, side elevation and plan at one scale. Dimensions in inches, millimeters in parentheses. Base widths and wall curves follow the product; only the figures shown are specified.

OVUM Specifications


VESSEL	
Overall	66.9 L x 31.5 W x 22.8 H in (1700 x 800 x 580 mm)
MATERIALS & FINISH	
Shell	Acrylic with insulating foam layer
Finish	Black acrylic, inside and out
Jets	2 jets, 3 water intakes
Light	LED
Cover	Included
ORDER	
Lead time	Made to commission, delivered in about 3 months, in many cases sooner
Delivery	Free, 48 contiguous United States
Warranty	5-Year Warranty on the shell, 1 year on the Hot & Cold Unit

HOT & COLD UNIT	
Type	Separate compact unit, heats and cools, on casters
Water temperature	37 to 104°F (3 to 40 °C)
Dimensions	15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm)
Thermal output	Cooling 3,210 W · heating 4,150 W · 1 HP
Water care	Filtration, ozone disinfection
Controls	Touch screen, Wi-Fi app
ELECTRICAL	
Unit supply	110 to 125 V, 60 Hz, grounded outlet
Protection	Residual current device on the unit, tested monthly
Power draw	About 1,150 W, around 10 A at 120 V; a standard 15 A household circuit is enough
INSTALLATION	
Prepare	Water supply to fill, an outlet for the plug, a drain point
Placement	Freestanding. Indoors or outdoors; a roof or some shade is recommended. Keep the cover on when the weather turns extreme; plug kept away from rain and water
Unit clearance	At least 20 in (50 cm) on every side; never in a closet or cabinet

MADE TO COMMISSION

LUNA

Hot & Cold thermal vessel, a round bowl for one or two.

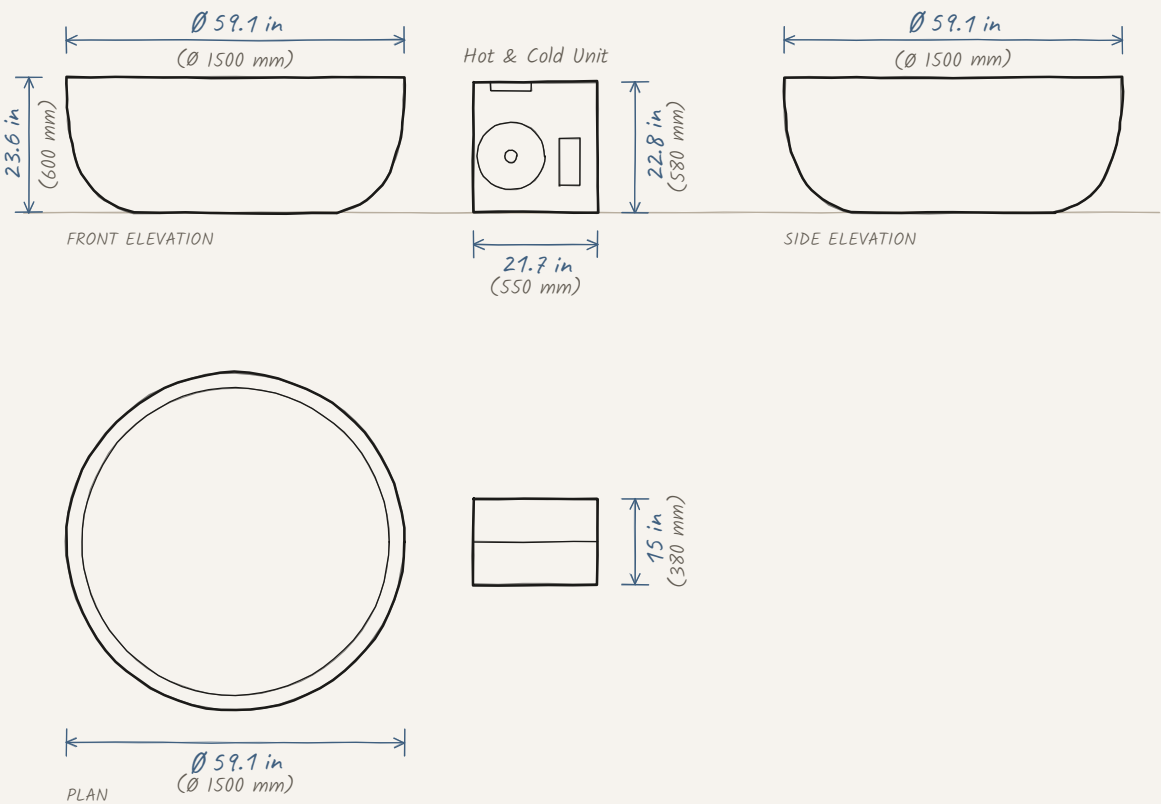

A circle of white acrylic, entered and sat in rather than lain in. Walls curving gently to a smaller base. The Hot & Cold Unit stands beside it.

Overall
Ø 59.1 × 23.6 H in (Ø 1500 × 600 mm)

Availability
Made to commission, delivered in about 3 months, in many cases sooner

Hot & Cold Unit
Separate compact unit, 15 W × 21.7 D × 22.8 H in (380 × 550 × 580 mm), drawn beside the vessel at the same scale

Water temperature
37 to 104°F

Delivery
Free, 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.

Front elevation, side elevation and plan at one scale. Dimensions in inches, millimeters in parentheses. Base widths and wall curves follow the product; only the figures shown are specified.

LUNA

Specifications

VESSEL

Overall	Ø 59.1 × 23.6 H in (Ø 1500 × 600 mm)
---------	--------------------------------------

MATERIALS & FINISH

Shell	Acrylic with insulating foam layer
Finish	White acrylic
Seats	One or two people
Jets	2 jets, 2 water intakes
Light	LED
Cover	Included

ORDER

Lead time	Made to commission, delivered in about 3 months, in many cases sooner
Delivery	Free, 48 contiguous United States
Warranty	5-Year Warranty on the shell, 1 year on the Hot & Cold Unit

HOT & COLD UNIT

Type	Separate compact unit, heats and cools, on casters
Water temperature	37 to 104°F (3 to 40 °C)
Dimensions	15 W × 21.7 D × 22.8 H in (380 × 550 × 580 mm)
Thermal output	Cooling 3,210 W · heating 4,150 W · 1 HP
Water care	Filtration, ozone disinfection
Controls	Touch screen, Wi-Fi app

ELECTRICAL

Unit supply	110 to 125 V, 60 Hz, grounded outlet
Protection	Residual current device on the unit, tested monthly
Power draw	About 1,150 W, around 10 A at 120 V; a standard 15 A household circuit is enough


INSTALLATION

Prepare	Water supply to fill, an outlet for the plug, a drain point
Placement	Freestanding. Indoors or outdoors; a roof or some shade is recommended. Keep the cover on when the weather turns extreme; plug kept away from rain and water
Unit clearance	At least 20 in (50 cm) on every side; never in a closet or cabinet

MADE TO COMMISSION

OBLONG

Hot & Cold thermal vessel, an oval in stainless steel.

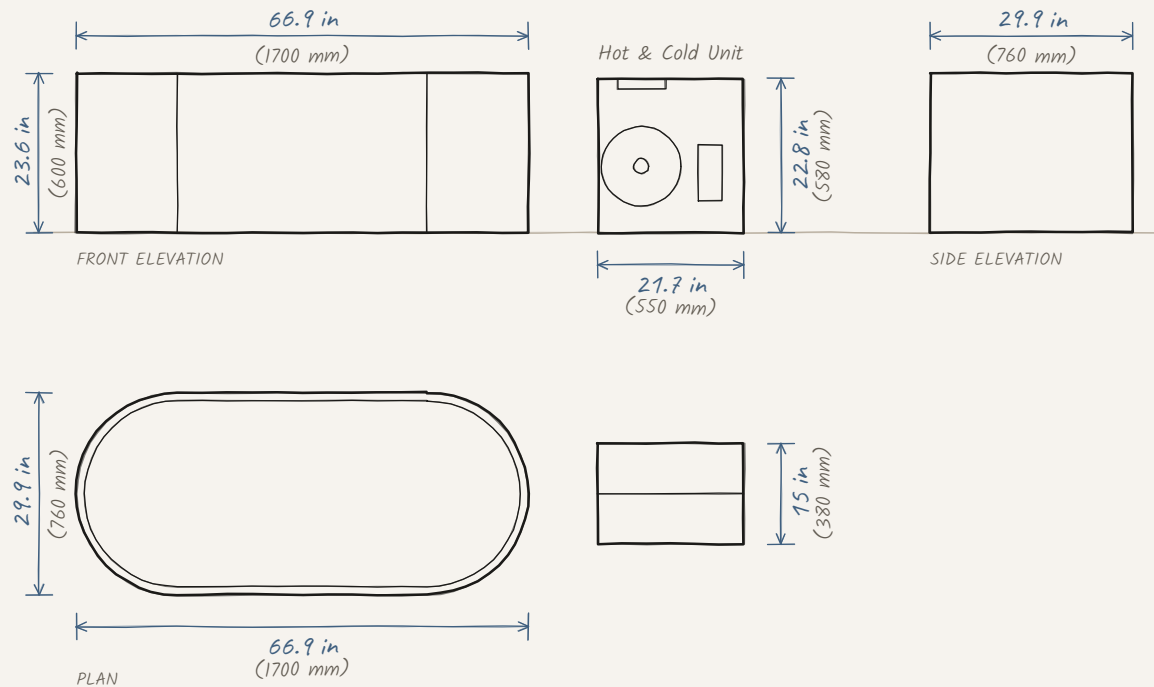

The long line of the bath in 304 stainless steel with a protective nano coating. The compact Hot & Cold Unit stands beside it.

Overall

66.9 L x 29.9 W x 23.6 H in (1700 x 760 x 600 mm)

Availability

Made to commission, delivered in about 3 months, in many cases sooner

Hot & Cold Unit

Separate compact unit, 15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm), drawn beside the vessel at the same scale

Water temperature

37 to 104°F

Delivery

Free, 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.

Front elevation, side elevation and plan at one scale. Dimensions in inches, millimeters in parentheses. Base widths and wall curves follow the product; only the figures shown are specified.

OBLONG


Specifications

VESSEL		HOT & COLD UNIT	
Overall	66.9 L x 29.9 W x 23.6 H in (1700 x 760 x 600 mm)	Type	Separate compact unit, heats and cools, on casters
MATERIALS & FINISH		Water temperature	37 to 104°F (3 to 40 °C)
Shell	Satin Steel, 304 stainless steel, nano coating	Dimensions	15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm)
Finish	Satin Steel, naturally bright	Thermal output	Cooling 3,210 W · heating 4,150 W · 1 HP
Jets / light	None on stainless steel	Water care	Filtration, ozone disinfection
Connections	One inlet, one outlet, one drain, external connectors	Controls	Touch screen, Wi-Fi app
Cover	Included	ELECTRICAL	
ORDER		Unit supply	110 to 125 V, 60 Hz, grounded outlet
Lead time	Made to commission, delivered in about 3 months, in many cases sooner	Protection	Residual current device on the unit, tested monthly
Delivery	Free, 48 contiguous United States	Power draw	About 1,150 W, around 10 A at 120 V; a standard 15 A household circuit is enough
Warranty	5-Year Warranty on the shell, 1 year on the Hot & Cold Unit	INSTALLATION	
		Prepare	Water supply to fill, an outlet for the plug, a drain point
		Placement	Freestanding. Indoors or outdoors. Keep the cover on when the weather turns extreme; plug kept away from rain and water
		Unit clearance	At least 20 in (50 cm) on every side; never in a closet or cabinet

MADE TO COMMISSION

AURUM

Hot & Cold thermal vessel, a stainless steel barrel.

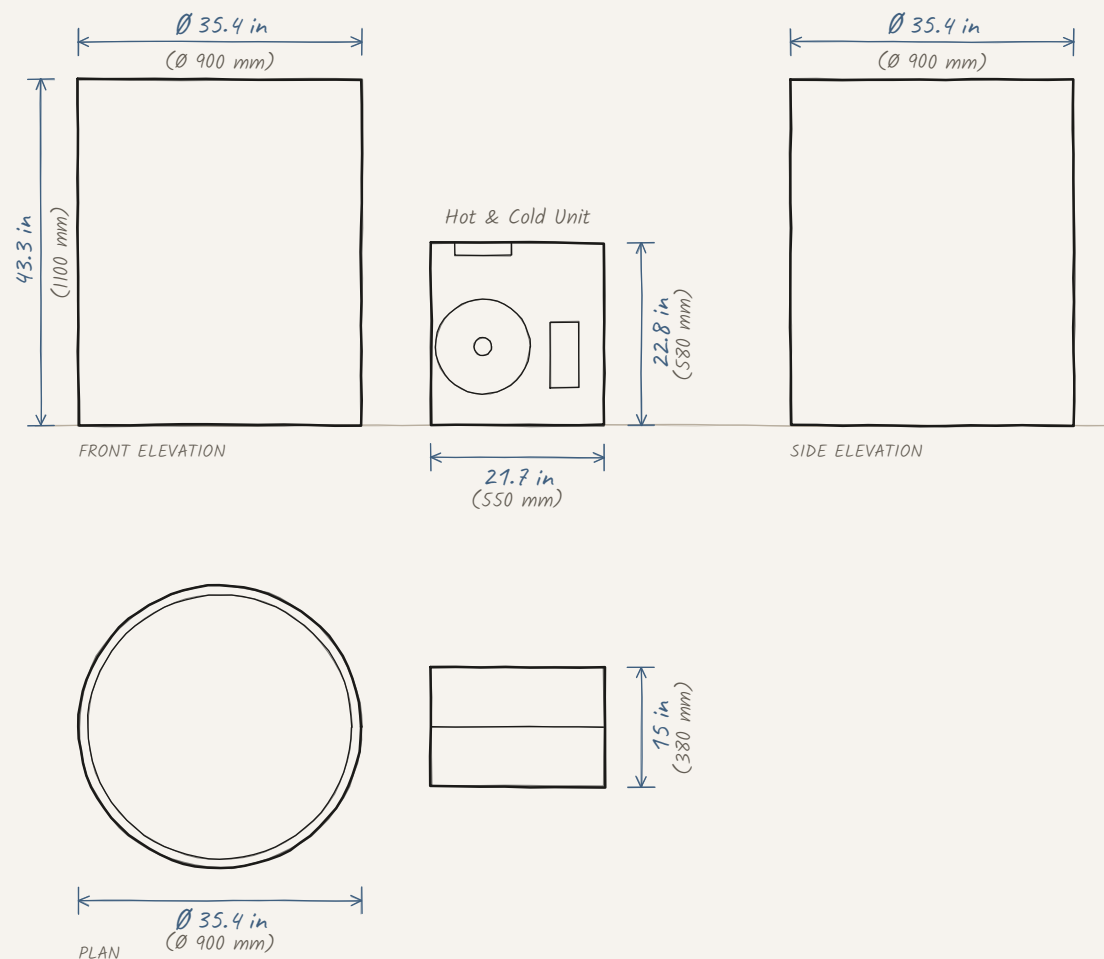

A cylinder, taller than it is wide: entered like a well and taken seated upright. A footprint under three feet across. The Hot & Cold Unit stands beside it.

Overall
 $\varnothing 35.4 \times 43.3$ H in ($\varnothing 900 \times 1100$ mm)

Availability
 Made to commission, delivered in about 3 months, in many cases sooner

Hot & Cold Unit
 Separate compact unit, 15 W $\times$ 21.7 D $\times$ 22.8 H in (380 $\times$ 550 $\times$ 580 mm), drawn beside the vessel at the same scale

Water temperature
 37 to 104°F

Delivery
 Free, 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.

Front elevation, side elevation and plan at one scale. Dimensions in inches, millimeters in parentheses. Base widths and wall curves follow the product; only the figures shown are specified.

AURUM Specifications


VESSEL	
Overall	Ø 35.4 × 43.3 H in (Ø 900 × 1100 mm)
MATERIALS & FINISH	
Shell	Satin Steel, 304 stainless steel, nano coating
Finish	Satin Steel, naturally bright
Jets / light	None on stainless steel
Connections	One inlet, one outlet, one drain, external connectors
Cover	Included
ORDER	
Lead time	Made to commission, delivered in about 3 months, in many cases sooner
Delivery	Free, 48 contiguous United States
Warranty	5-Year Warranty on the shell, 1 year on the Hot & Cold Unit

HOT & COLD UNIT	
Type	Separate compact unit, heats and cools, on casters
Water temperature	37 to 104°F (3 to 40 °C)
Dimensions	15 W × 21.7 D × 22.8 H in (380 × 550 × 580 mm)
Thermal output	Cooling 3,210 W · heating 4,150 W · 1 HP
Water care	Filtration, ozone disinfection
Controls	Touch screen, Wi-Fi app
ELECTRICAL	
Unit supply	110 to 125 V, 60 Hz, grounded outlet
Protection	Residual current device on the unit, tested monthly
Power draw	About 1,150 W, around 10 A at 120 V; a standard 15 A household circuit is enough
INSTALLATION	
Prepare	Water supply to fill, an outlet for the plug, a drain point
Placement	Freestanding. Indoors or outdoors. Keep the cover on when the weather turns extreme; plug kept away from rain and water
Unit clearance	At least 20 in (50 cm) on every side; never in a closet or cabinet

MADE TO COMMISSION

FACET

Hot & Cold thermal vessel, eight faces of stainless steel.

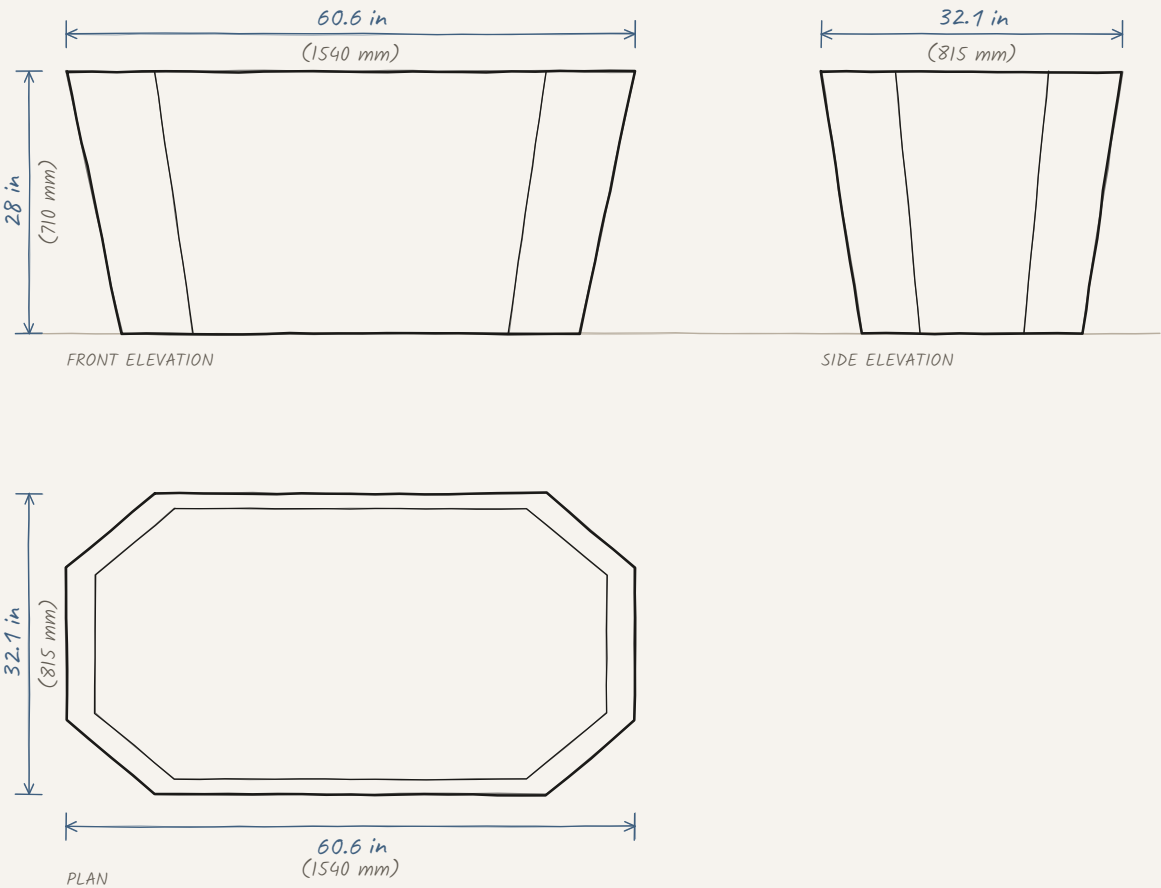

Cut like a stone: each plane meets the light at its own angle. The deepest of the long forms. Its Hot & Cold Unit stands beside it.

Overall
60.6 L x 32.1 W x 28 H in (1540 x 815 x 710 mm)

Availability
Made to commission, delivered in about 3 months, in many cases sooner

Hot & Cold Unit
Separate compact unit, 15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm), drawn beside the vessel at the same scale

Water temperature
37 to 104°F

Delivery
Free, 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.

Front elevation, side elevation and plan at one scale. Dimensions in inches, millimeters in parentheses. Base widths and wall curves follow the product; only the figures shown are specified.

FACET


Specifications

VESSEL	
Overall	60.6 L x 32.1 W x 28 H in (1540 x 815 x 710 mm)
MATERIALS & FINISH	
Shell	Satin Steel, stainless steel
Finish	Satin Steel, naturally bright
ORDER	
Lead time	Made to commission, delivered in about 3 months, in many cases sooner
Delivery	Free, 48 contiguous United States
Warranty	5-Year Warranty on the shell, 1 year on the Hot & Cold Unit
HOT & COLD UNIT	
Type	Separate compact unit, heats and cools, on casters
Water temperature	37 to 104°F (3 to 40 °C)
Dimensions	15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm)
Thermal output	Cooling 3,210 W · heating 4,150 W · 1 HP
Water care	Filtration, ozone disinfection
Controls	Touch screen, Wi-Fi app
ELECTRICAL	
Unit supply	110 to 125 V, 60 Hz, grounded outlet
Protection	Residual current device on the unit, tested monthly
Power draw	About 1,150 W, around 10 A at 120 V; a standard 15 A household circuit is enough
INSTALLATION	
Prepare	Water supply to fill, an outlet for the plug, a drain point
Placement	Freestanding. Indoors or outdoors. Keep the cover on when the weather turns extreme; plug kept away from rain and water
Unit clearance	At least 20 in (50 cm) on every side; never in a closet or cabinet

MADE TO COMMISSION

COVE

Hot & Cold thermal vessel, a generous oval in white acrylic.

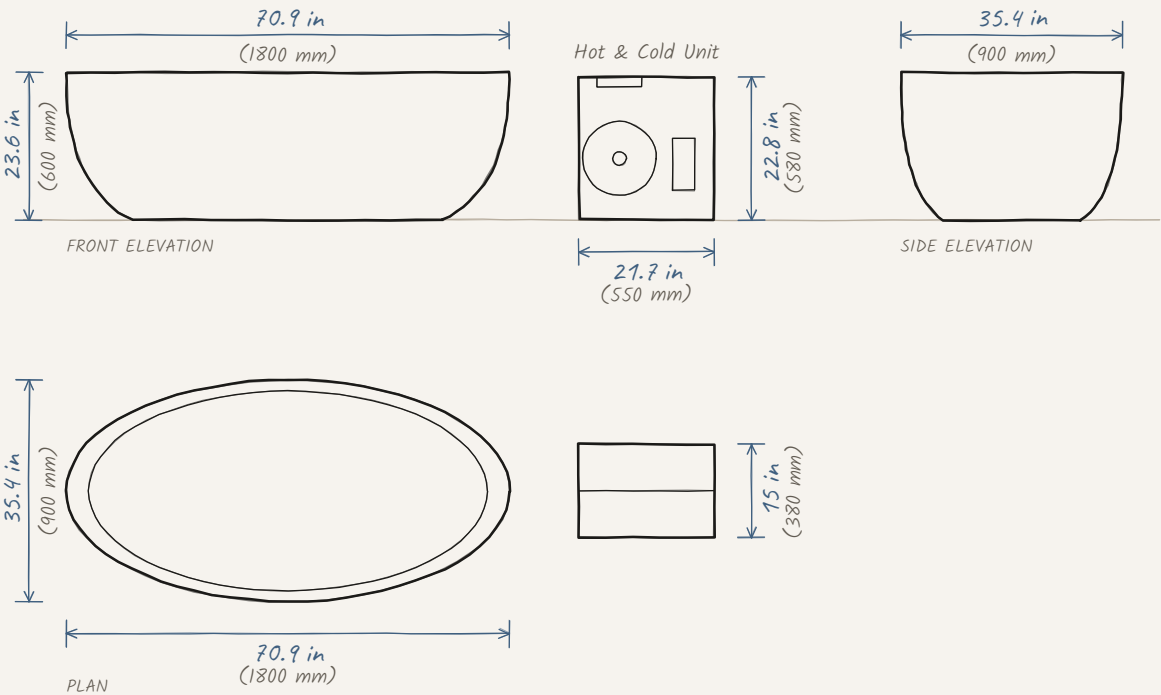

Room to stretch out fully, with a soft white rim that follows the body. The compact Hot & Cold Unit stands beside it.

Overall
70.9 L x 35.4 W x 23.6 H in (1800 x 900 x 600 mm)

Availability
Made to commission, delivered in about 3 months, in many cases sooner

Hot & Cold Unit
Separate compact unit, 15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm), drawn beside the vessel at the same scale

Water temperature
37 to 104°F

Delivery
Free, 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.

Front elevation, side elevation and plan at one scale. Dimensions in inches, millimeters in parentheses. Base widths and wall curves follow the product; only the figures shown are specified.

COVE


Specifications

VESSEL	
Overall	70.9 L x 35.4 W x 23.6 H in (1800 x 900 x 600 mm)
MATERIALS & FINISH	
Shell	Acrylic with insulating foam layer
Finish	White acrylic
Cover	Included
ORDER	
Lead time	Made to commission, delivered in about 3 months, in many cases sooner
Delivery	Free, 48 contiguous United States
Warranty	5-Year Warranty on the shell, 1 year on the Hot & Cold Unit
HOT & COLD UNIT	
Type	Separate compact unit, heats and cools, on casters
Water temperature	37 to 104°F (3 to 40 °C)
Dimensions	15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm)
Thermal output	Cooling 3,210 W · heating 4,150 W · 1 HP
Water care	Filtration, ozone disinfection
Controls	Touch screen, Wi-Fi app
ELECTRICAL	
Unit supply	110 to 125 V, 60 Hz, grounded outlet
Protection	Residual current device on the unit, tested monthly
Power draw	About 1,150 W, around 10 A at 120 V; a standard 15 A household circuit is enough
INSTALLATION	
Prepare	Water supply to fill, an outlet for the plug, a drain point
Placement	Freestanding. Indoors or outdoors; a roof or some shade is recommended. Keep the cover on when the weather turns extreme; plug kept away from rain and water
Unit clearance	At least 20 in (50 cm) on every side; never in a closet or cabinet

MADE TO COMMISSION

NOOK

Hot & Cold thermal vessel, compact, taken seated.

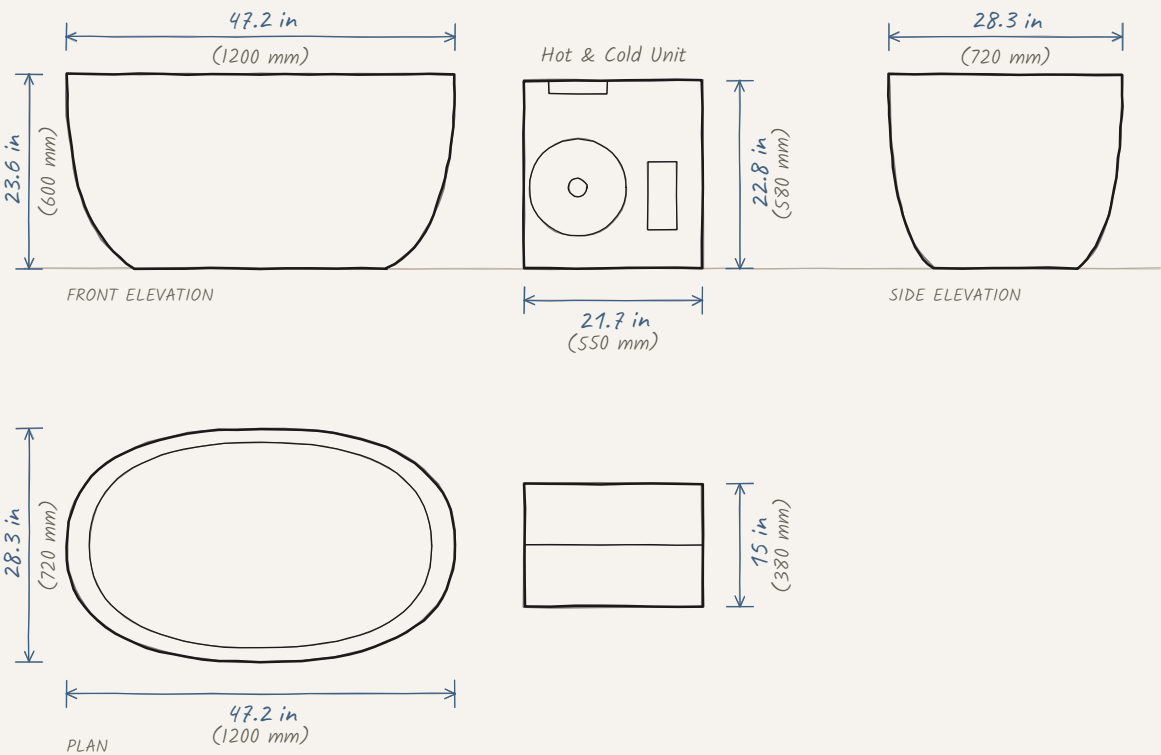

The smallest vessel in the collection, for rooms where every inch counts: a city bathroom, a dressing room, a gym corner. The Hot & Cold Unit stands beside it.

Overall
47.2 L x 28.3 W x 23.6 H in (1200 x 720 x 600 mm)

Availability
Made to commission, delivered in about 3 months, in many cases sooner

Hot & Cold Unit
Separate compact unit, 15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm), drawn beside the vessel at the same scale

Water temperature
37 to 104°F

Delivery
Free, 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.

Front elevation, side elevation and plan at one scale. Dimensions in inches, millimeters in parentheses. Base widths and wall curves follow the product; only the figures shown are specified.

NOOK Specifications


VESSEL	
Overall	47.2 L x 28.3 W x 23.6 H in (1200 x 720 x 600 mm)
MATERIALS & FINISH	
Shell	Acrylic with insulating foam layer
Finish	White acrylic
Cover	Included
ORDER	
Lead time	Made to commission, delivered in about 3 months, in many cases sooner
Delivery	Free, 48 contiguous United States
Warranty	5-Year Warranty on the shell, 1 year on the Hot & Cold Unit

HOT & COLD UNIT	
Type	Separate compact unit, heats and cools, on casters
Water temperature	37 to 104°F (3 to 40 °C)
Dimensions	15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm)
Thermal output	Cooling 3,210 W · heating 4,150 W · 1 HP
Water care	Filtration, ozone disinfection
Controls	Touch screen, Wi-Fi app
ELECTRICAL	
Unit supply	110 to 125 V, 60 Hz, grounded outlet
Protection	Residual current device on the unit, tested monthly
Power draw	About 1,150 W, around 10 A at 120 V; a standard 15 A household circuit is enough
INSTALLATION	
Prepare	Water supply to fill, an outlet for the plug, a drain point
Placement	Freestanding. Indoors or outdoors; a roof or some shade is recommended. Keep the cover on when the weather turns extreme; plug kept away from rain and water
Unit clearance	At least 20 in (50 cm) on every side; never in a closet or cabinet

MADE TO COMMISSION

PRISM

Hot & Cold thermal vessel, a faceted form in white acrylic.

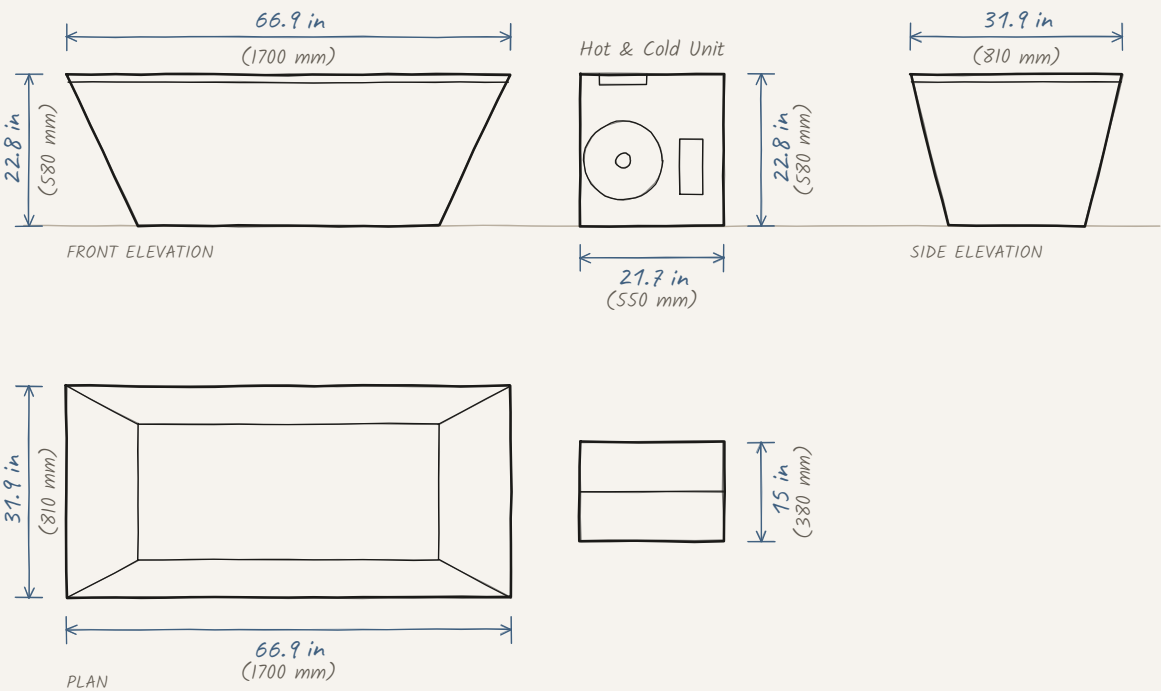

Walls opening outward from a narrow base to a wide rim, the light breaking along clean edges. The compact Hot & Cold Unit stands beside it.

Overall
66.9 L x 31.9 W x 22.8 H in (1700 x 810 x 580 mm)

Availability
Made to commission, delivered in about 3 months, in many cases sooner

Hot & Cold Unit
Separate compact unit, 15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm), drawn beside the vessel at the same scale

Water temperature
37 to 104°F

Delivery
Free, 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.

Front elevation, side elevation and plan at one scale. Dimensions in inches, millimeters in parentheses. Base widths and wall curves follow the product; only the figures shown are specified.

PRISM Specifications


VESSEL	
Overall	66.9 L x 31.9 W x 22.8 H in (1700 x 810 x 580 mm)
MATERIALS & FINISH	
Shell	Acrylic with insulating foam layer
Finish	White acrylic
Cover	Included
ORDER	
Lead time	Made to commission, delivered in about 3 months, in many cases sooner
Delivery	Free, 48 contiguous United States
Warranty	5-Year Warranty on the shell, 1 year on the Hot & Cold Unit

HOT & COLD UNIT	
Type	Separate compact unit, heats and cools, on casters
Water temperature	37 to 104°F (3 to 40 °C)
Dimensions	15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm)
Thermal output	Cooling 3,210 W · heating 4,150 W · 1 HP
Water care	Filtration, ozone disinfection
Controls	Touch screen, Wi-Fi app
ELECTRICAL	
Unit supply	110 to 125 V, 60 Hz, grounded outlet
Protection	Residual current device on the unit, tested monthly
Power draw	About 1,150 W, around 10 A at 120 V; a standard 15 A household circuit is enough
INSTALLATION	
Prepare	Water supply to fill, an outlet for the plug, a drain point
Placement	Freestanding. Indoors or outdoors; a roof or some shade is recommended. Keep the cover on when the weather turns extreme; plug kept away from rain and water
Unit clearance	At least 20 in (50 cm) on every side; never in a closet or cabinet

MADE TO COMMISSION

BLOCK

Hot & Cold thermal vessel, a straight block in white acrylic.

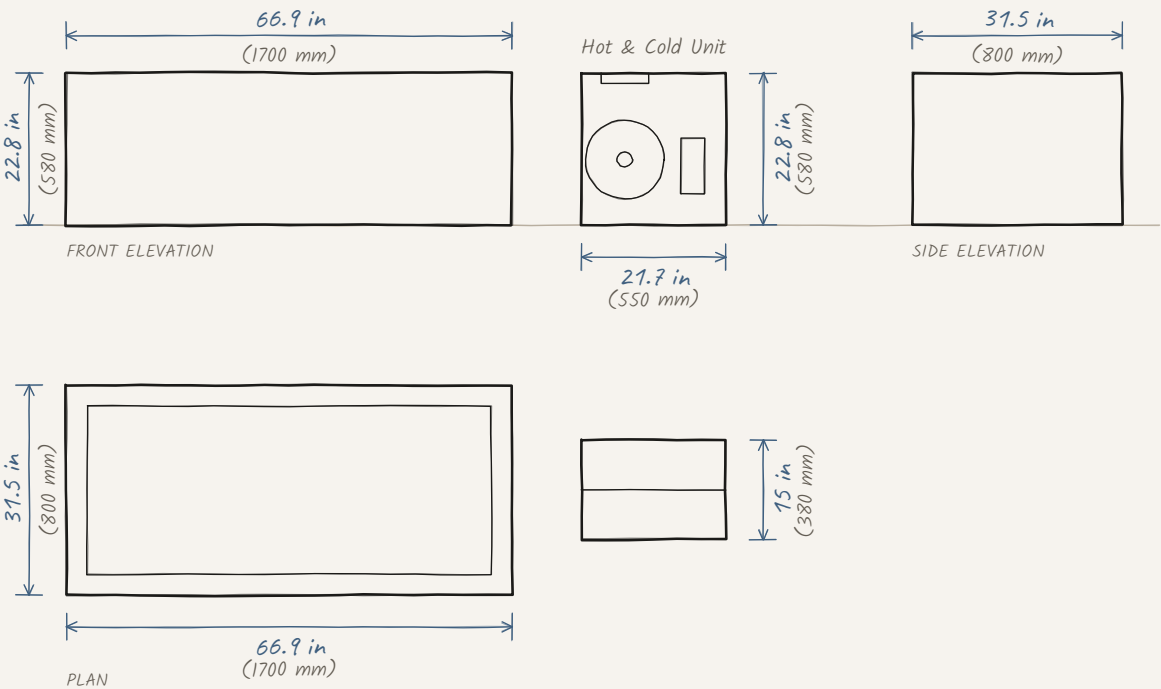

Four straight walls, right angles, a flat rim: the vessel reduced to its geometry. The compact Hot & Cold Unit stands beside it.

Overall
66.9 L x 31.5 W x 22.8 H in (1700 x 800 x 580 mm)

Availability
Made to commission, delivered in about 3 months, in many cases sooner

Hot & Cold Unit
Separate compact unit, 15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm), drawn beside the vessel at the same scale

Water temperature
37 to 104°F

Delivery
Free, 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.

Front elevation, side elevation and plan at one scale. Dimensions in inches, millimeters in parentheses. Base widths and wall curves follow the product; only the figures shown are specified.

BLOCK Specifications


VESSEL	
Overall	66.9 L x 31.5 W x 22.8 H in (1700 x 800 x 580 mm)
MATERIALS & FINISH	
Shell	Acrylic with insulating foam layer
Finish	White acrylic
Cover	Included
ORDER	
Lead time	Made to commission, delivered in about 3 months, in many cases sooner
Delivery	Free, 48 contiguous United States
Warranty	5-Year Warranty on the shell, 1 year on the Hot & Cold Unit

HOT & COLD UNIT	
Type	Separate compact unit, heats and cools, on casters
Water temperature	37 to 104°F (3 to 40 °C)
Dimensions	15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm)
Thermal output	Cooling 3,210 W · heating 4,150 W · 1 HP
Water care	Filtration, ozone disinfection
Controls	Touch screen, Wi-Fi app
ELECTRICAL	
Unit supply	110 to 125 V, 60 Hz, grounded outlet
Protection	Residual current device on the unit, tested monthly
Power draw	About 1,150 W, around 10 A at 120 V; a standard 15 A household circuit is enough
INSTALLATION	
Prepare	Water supply to fill, an outlet for the plug, a drain point
Placement	Freestanding. Indoors or outdoors; a roof or some shade is recommended. Keep the cover on when the weather turns extreme; plug kept away from rain and water
Unit clearance	At least 20 in (50 cm) on every side; never in a closet or cabinet

MADE TO COMMISSION

ALCOVE

Hot & Cold thermal vessel, an oval with one straight side.

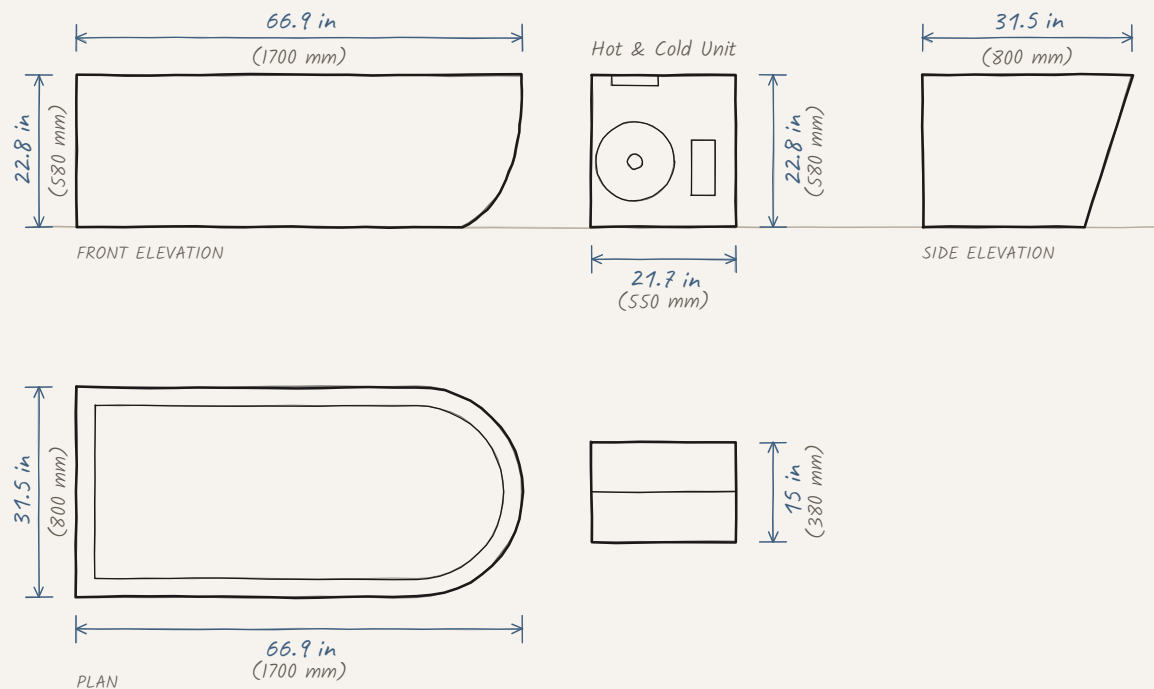

Drawn to stand close to a wall or within a niche, its curved front turned to the room. The compact Hot & Cold Unit stands beside it.

Overall

66.9 L × 31.5 W × 22.8 H in (1700 × 800 × 580 mm)

Availability

Made to commission, delivered in about 3 months, in many cases sooner

Hot & Cold Unit

Separate compact unit, 15 W × 21.7 D × 22.8 H in (380 × 550 × 580 mm), drawn beside the vessel at the same scale

Water temperature

37 to 104°F

Delivery

Free, 48 contiguous United States. 5-Year Warranty on the shell, 1 year on the Hot & Cold Unit.

Front elevation, side elevation and plan at one scale. Dimensions in inches, millimeters in parentheses. Base widths and wall curves follow the product; only the figures shown are specified.

ALCOVE

Specifications

VESSEL		HOT & COLD UNIT	
Overall	66.9 L x 31.5 W x 22.8 H in (1700 x 800 x 580 mm)	Type	Separate compact unit, heats and cools, on casters
MATERIALS & FINISH		Water temperature	37 to 104°F (3 to 40 °C)
Shell	Acrylic with insulating foam layer	Dimensions	15 W x 21.7 D x 22.8 H in (380 x 550 x 580 mm)
Finish	White acrylic	Thermal output	Cooling 3,210 W · heating 4,150 W · 1 HP
Cover	Included	Water care	Filtration, ozone disinfection
ORDER		Controls	Touch screen, Wi-Fi app
Lead time	Made to commission, delivered in about 3 months, in many cases sooner	ELECTRICAL	
Delivery	Free, 48 contiguous United States	Unit supply	110 to 125 V, 60 Hz, grounded outlet
Warranty	5-Year Warranty on the shell, 1 year on the Hot & Cold Unit	Protection	Residual current device on the unit, tested monthly
		Power draw	About 1,150 W, around 10 A at 120 V; a standard 15 A household circuit is enough
		INSTALLATION	
		Prepare	Water supply to fill, an outlet for the plug, a drain point
		Placement	Freestanding. Indoors or outdoors; a roof or some shade is recommended. Keep the cover on when the weather turns extreme; plug kept away from rain and water
		Unit clearance	At least 20 in (50 cm) on every side; never in a closet or cabinet